

EP type power ferrite product series

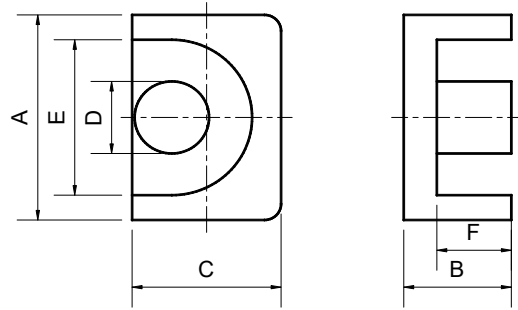


Fig.1

Specification	Fig.	Dimensions (mm)						Effective parameter			Inductance AL(nH/N ²)		Weight (g/set)
		A	B	C	D	E	F	Ae(mm ²)	Le(mm)	Ve(mm ³)	FX44	FX95	
EP13	1	12.7±0.3	6.65±0.20	8.8±0.20	4.35±0.20	9.8min	4.7±0.20	19,50	23,60	460,20	1500±25%	1850±25%	4,80
EP17	1	18.2±0.4	8.70±0.20	11.0±0.25	5.70±0.20	12.40min	5.85±0.20	34,00	28,00	953,30	2400±25%	3000±25%	12,70
EP20	1	24.0±0.5	11.0±0.20	15.0±0.40	8.8±0.30	16.10min	7.40±0.20	78,70	40,15	3159,81	4000±25%	5000±25%	29,50

Remark: Testing condition for AL: 1KHz, 0.3V, 100Ts

The above is the usually type, we can redesign according to customer's request.